

Dual 7" 3RU Rack Monitors

Perfect 3G-SDI Monitoring with Broadcast Quality for Live Events & Shows

LILLIPUT®

3RURackMonitors

Broadcast quality 3G-SDI rack monitors that make settings changed with great convenience.



Model No.: RM-7028S

With dual 7" IPS screens, viewing SD,HD and 3G-SDI video on 3RU rack monitor.

1280×800

Metal Housing

- 178° wide viewing angles
- High brightness: 400cd/㎡
- High contrast: 800:1
- Faster response time
- TALLY interface with indicating light
- Firm & thin design



Intelligent SDI Monitoring

Lilliput 7" 3RU rack monitors are the best solution for high quality SDI monitoring! They have a various of use for broadcast, on-site monitoring and live broadcast van, etc! As well as setup a video wall of rack monitors in control room and see all the scenes. A rack for a customized monitoring solution also can be supported for viewing different angles and images displays.




Perfect Dual Monitoring

Because of better filtering and scaling advantages, Lilliput's 3RU rack monitors are really suitable for broadcast quality monitoring system. With high quality SD, HD & 3G-SDI inputs, make sure that precise color can be controlled under multiple displays conveniently. Highly integrated Tally port and Tally description, which are ideal for large broadcast systems.




Smart Ethernet Control (coming soon)

Using laptop, Mac or PC to set and adjust each monitor easily with relevant softwares via ethernet network.

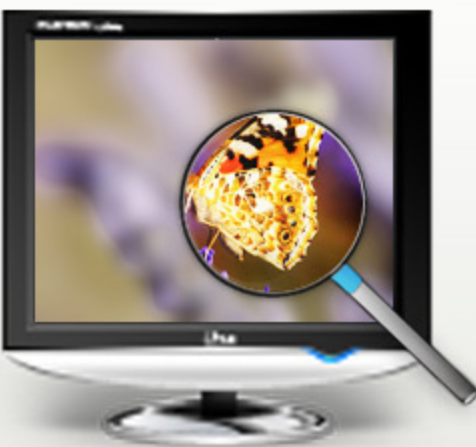

Excellent Display & Design

Lilliput's dual 7" rack monitors feature two attractive IPS panels, which with 1280x800 high resolution, 178 ° wide viewing angles, high brightness & contrast, and faster response time; that providing excellent viewing experience. Metal & thin housing design is also welcomed by live events and shows.

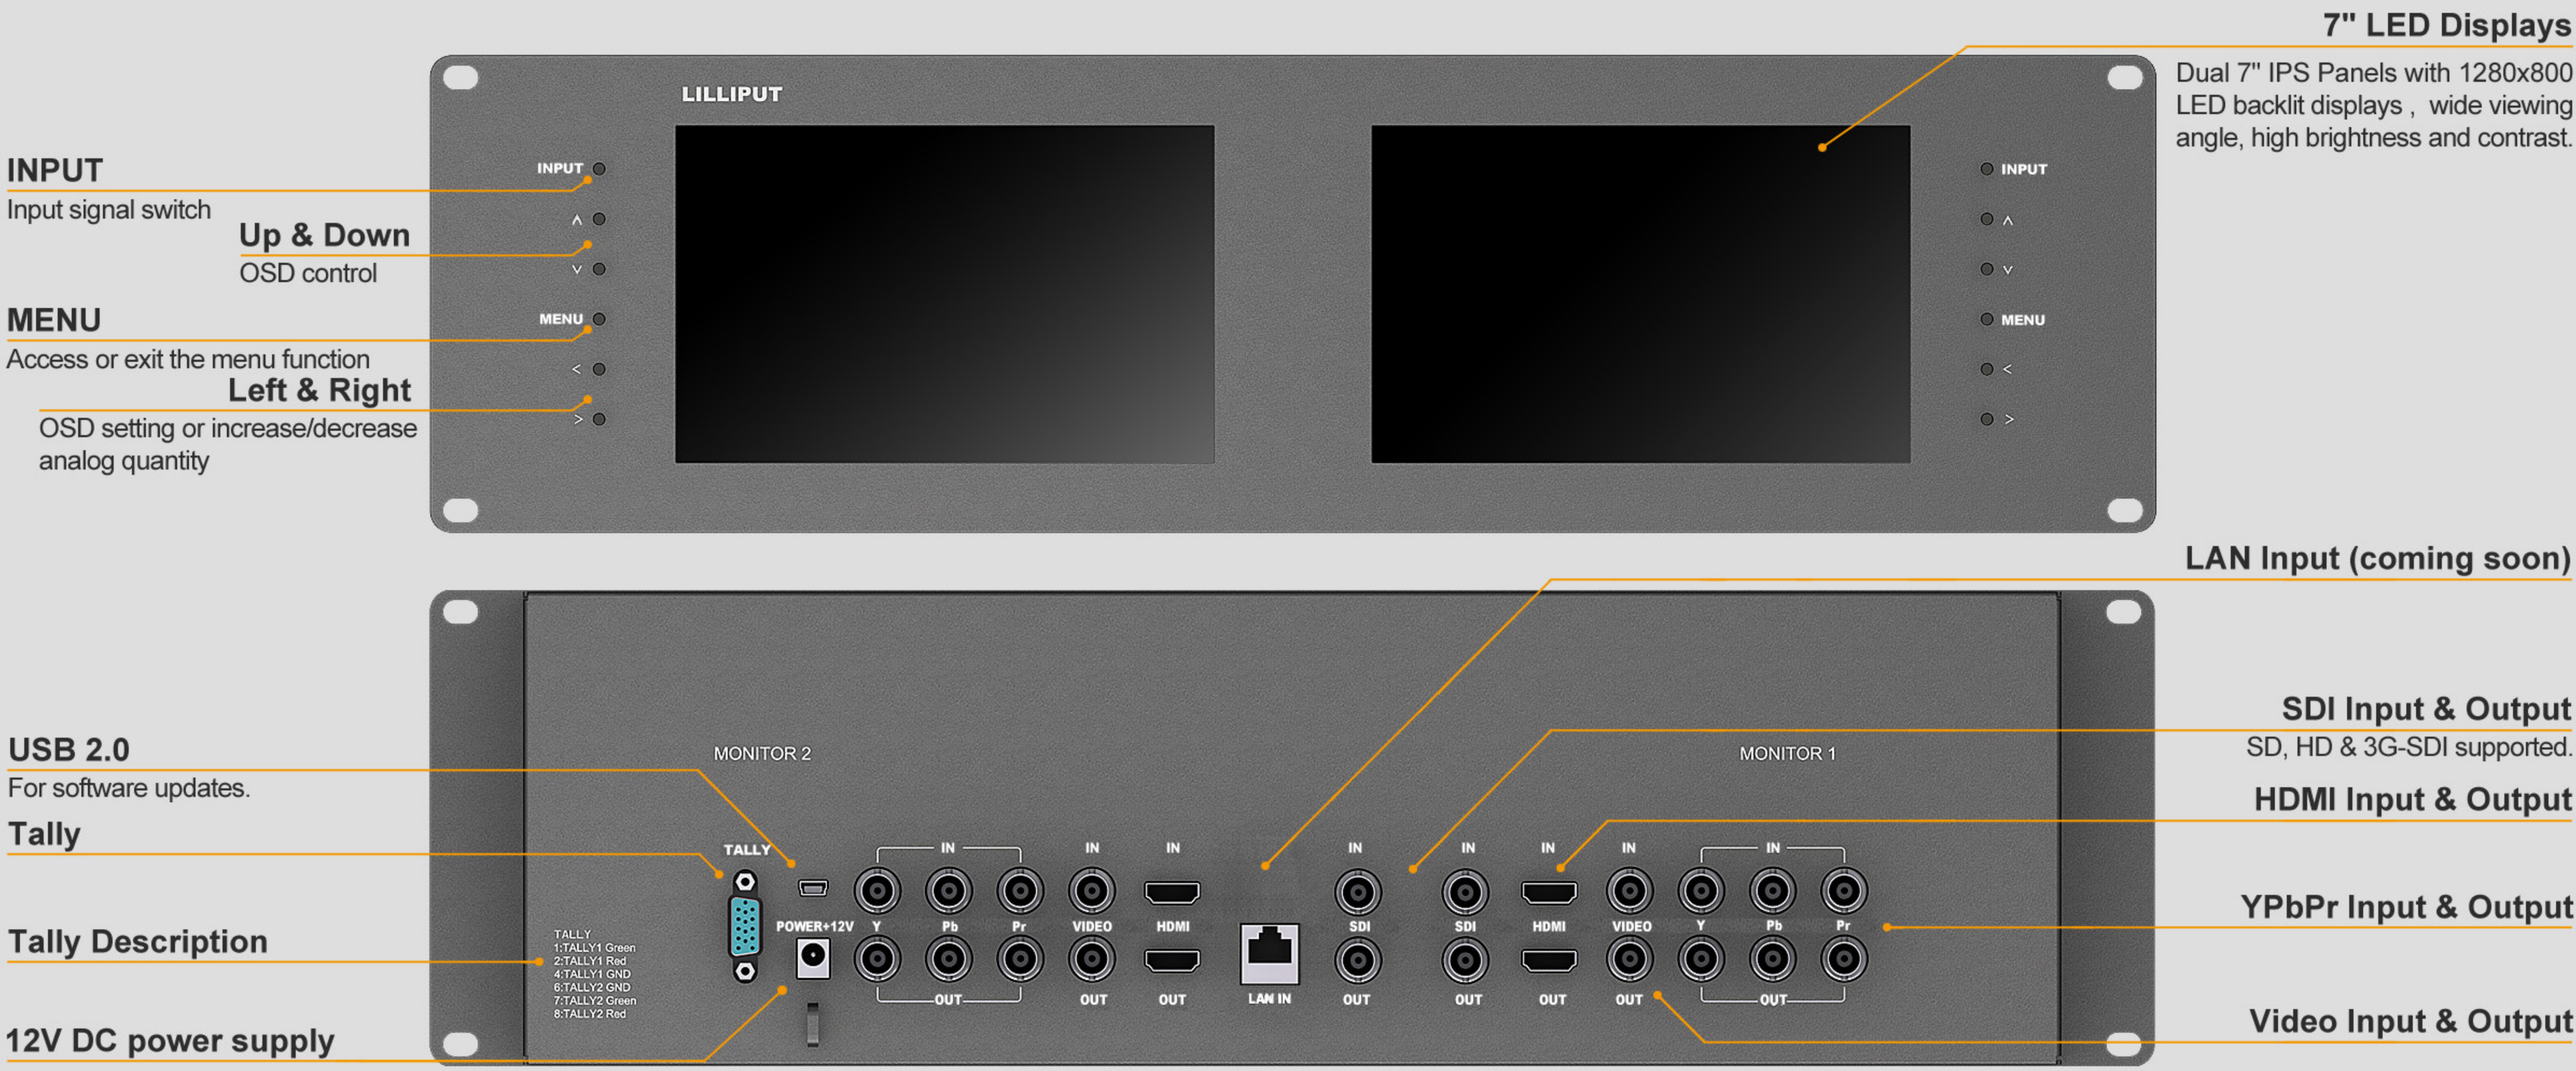


DISPLAY	Panel	7" LED backlit
	Physical Resolution	1280×800
	Aspect Ratio	16:9
	Brightness	400cd/㎡
	Contrast	800:1
	Viewing Angle	178°/ 178°(H/V) (IPS)
INPUT	3G-SDI	2
	HDMI	2
	YPbPr	6(BNC)
	Composite	2
	TALLY	2
	LAN	1(coming soon)
	USB 2.0	1(mini)
OUTPUT	3G-SDI	2
	HDMI	2
	YPbPr	6(BNC)
	Composite	2
	Current	1500mA
POWER	Input Voltage	DC 12V
	Power Consumption	≤18W
	Operating Temperature	-20℃~60℃
ENVIRONMENT	Storage Temperature	-30℃~70℃
	Dimension(LWD)	482.5×133.5×25.3mm
DIMENSION	Weight	2885g

ACCESSORIES



12V DC adapter

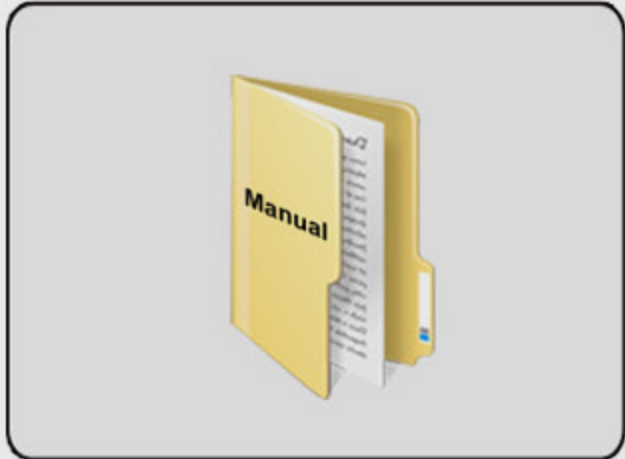

Manual

www.lilliput.com



ZHANGZHOU LILLIPUT ELECTRONIC TECHNOLOGY CO., LTD.
Add : Zong Si Road, Lan Tian Economic Development Zone, Zhang Zhou, Fu Jian, 363005, China
Tel: +86-596-2109661/2109323
Fax: +86-596-2109611 Email: sales@lilliput.com

LILLIPUT®